



ECCELLENZA MOMENTUM CLEANING & STARTUP PROCEDURE

This procedure demonstrates how to properly clean
and sanitize the Eccellenza Momentum brewer

This procedure should take approximately 60 minutes

Tools Needed

- ◆ Keurig® Bean to Cup Deep Cleaning kit (*if available*)
- ◆ Large bucket or container
- ◆ Available sink
- ◆ Phillips screwdriver
- ◆ Key to main door
- ◆ Small paint brush



Table of Contents

Disconnecting & Draining	Pg. 3
Removing the Brewer Assembly	Pg. 4
Removing the Coffee Hopper	Pg. 5
Removing the Powder System	Pg. 6 - 9
Cleaning Interior Components	Pg. 10
Cleaning & Sanitizing Procedure	Pg. 11
Reinstalling the Powder System	Pg. 12 - 13
Reinstalling the Brewer Assembly	Pg. 14
Reinstalling the Coffee Hopper	Pg. 15
Restarting & Refilling	Pg. 16
Cleaning External Components	Pg. 17
How to Perform Both Cleanings & Rinses	Pg. 18 - 22
Performing Test Brews	Pg. 23

Note:

Cleaning: *Refers to generally wiping down/removing debris or spills from surfaces.*

Sanitization: *Refers to using a disinfecting solution, wipe, or a cloth with disinfectant on it to help eliminate contaminants and germs.*

Disconnecting & Draining


Using key, unlock main door, remove waste container and open main door.



Turn the power switch to the O position and unplug from grounded outlet.



Locate the drain hose on the main door, open valve and drain hot water into a large 5 gallon bucket or water-tight container.



Stow drain hose back into location on main door



Removing the Brewer Assembly

Remove the coffee spout from the front of the brewer assembly.



Remove the brewer assembly by pressing the **red** button and turning clockwise while lifting.



Carefully remove the wiper and thoroughly clean the exterior of both parts.

NOTE: *Brewer assembly cleaning instructions can be found on page 20.*




Removing the Coffee Hopper

If locked, using key, unlock and remove the coffee hopper lid



Locate and remove the two screws below the coffee hopper.

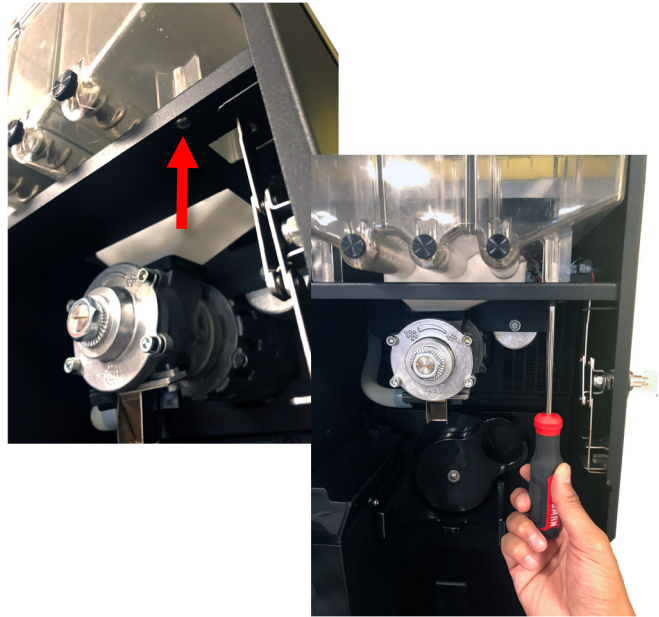

Lift the coffee hopper from machine and remove.
If necessary, discard coffee beans. Wipe down or thoroughly clean the hopper.

NOTE: See cleaning instructions on page 11.




Removing the Powder System

Disconnect the hoses to mixing chambers.




Unlock and remove the mixing chambers.

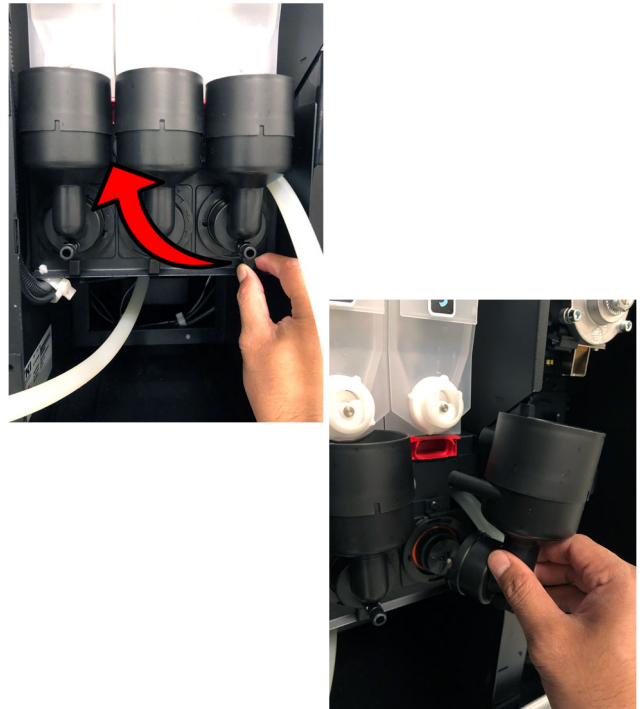

Remove the mixing disks by sliding forward from the whipper motor shaft.



Remove the locking rings by turning clockwise and dislodging from tab..

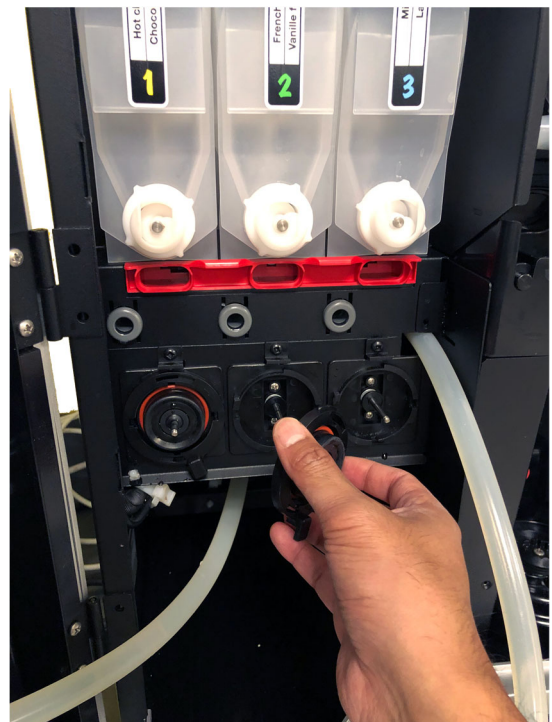


Removing the Powder System *cont.*

Grab the **red** powder drawer and pull towards you to remove.



Lift the powder lid.

NOTE: *If locked, use key to unlock.*

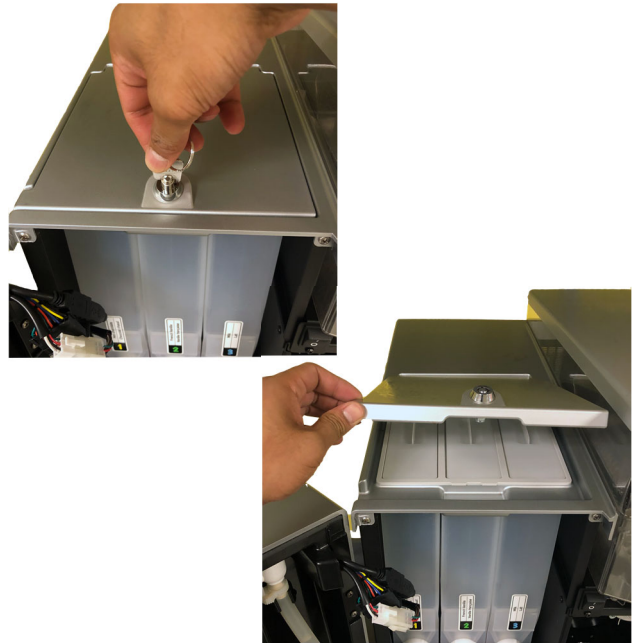

Remove the powder hopper caps.




Carefully remove the powder hopper liner.



Removing the Powder System *cont.*

Locate screw underneath the spout support, unscrew and remove the spout support.

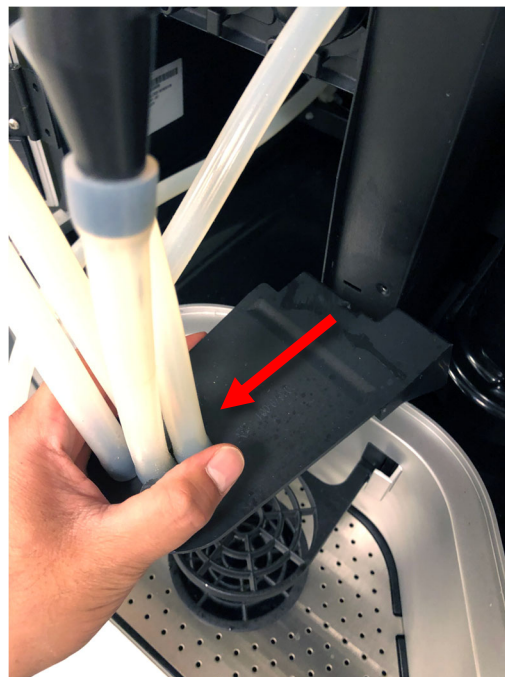

Remove and empty the powder hoppers.




Removing the Powder System *cont.*

NOTE: *If needed, the hoppers can be disassembled (shown below) then cleaned and sanitized following instructions on page 11. Otherwise they can just be refilled following instructions on page 23.*



Clean and sanitize all removed powder system parts in accordance with the Cleaning & Sanitizing procedure on page 11.

NOTE: *We recommend cleaning and sanitizing all parts with Urnex® products from the Keurig® Bean to Cup Deep Cleaning Kit, but comparable agents may also be used.*

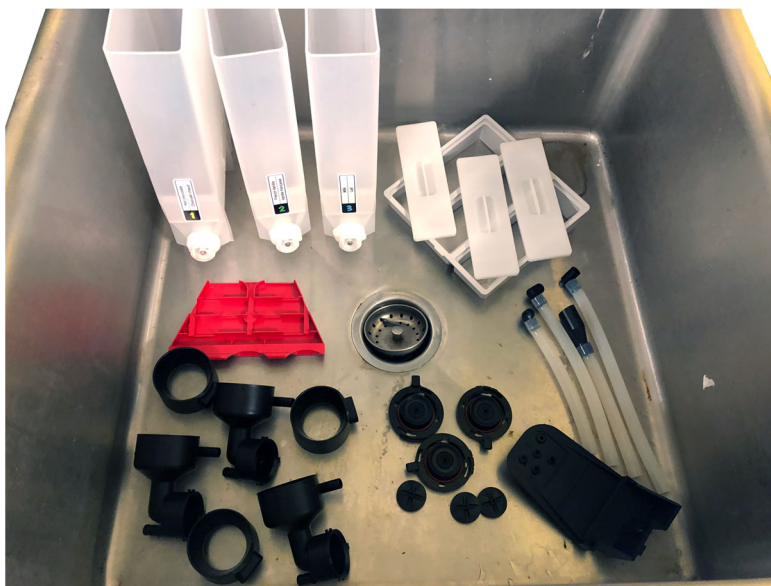

Cleaning Interior & Exterior Components

Wipe the interior area around the brewer motor with a clean cloth dipped in Urnex® Complete Café sanitizing solution.

NOTE: If available, Urnex® Café Wipz can be used.




Using a small brush, sweep out any powder residue present around the powder hoppers.



Remove and wipe down the lower tray & grill using cleaning instructions on page 11.

NOTE: Reinstall following cleaning.

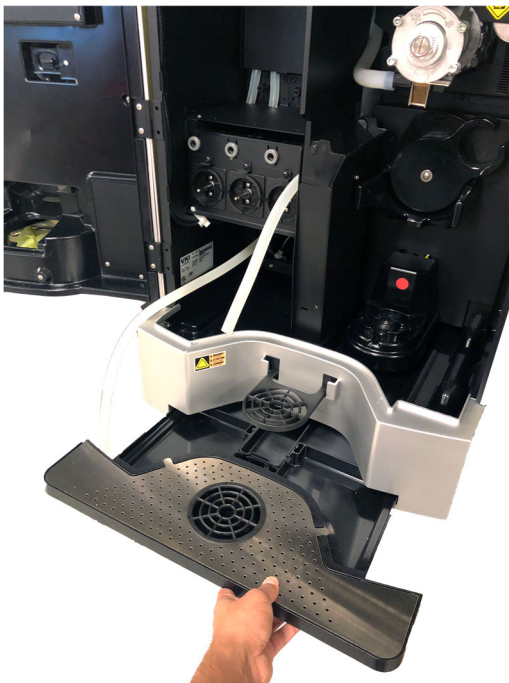

Cleaning & Sanitizing Procedure



Cleaning Solution

1. Prepare solution by adding 8 oz (240 ml) of Urnex® Rinza concentrate to 1 gallon (3.5 L) of warm tap water (*or equivalent dilution*).
2. Mix well and use immediately.
3. Soak removed parts for 30 minutes in solution.
4. Empty bucket and set aside parts to prepare sanitizing solution per the instructions below.

If sanitizing procedure will not be performed, rinse well under clean running water and allow parts to drain and dry completely.

NOTE: For non-removable parts, add cleaning solution to a soft cloth and use it to coat appliance parts. Then let sit for 30 minutes prior to wiping down with sanitizer solution.

Sanitizing Solution

NOTE: Parts must be cleaned prior to sanitizing.

1. Prepare solution by adding 0.5 oz (15 mL) of Urnex® Complete Café concentrate to 1 gallon (3.7 L) of warm tap water.
2. Mix well and use immediately.
3. Soak parts in solution for 1 minute.
4. Remove parts from solution and allow to drain and dry completely.

Do **NOT** rinse or apply water.

If parts were not removed from the appliance, wipe with a clean soft cloth and let air dry.

Sanitizing Spray for Machine Surfaces

NOTE: For non-removable brewer parts and to use on all parts in between sanitizing soaks.

1. Prepare a solution of 4 mL of Urnex® Complete Café Sanitizer to 1 L of water in a spray bottle.
2. Spray exterior surface of appliance and allow solution to remain on surface for 1 minute.
3. Wipe away with clean cloth and allow to fully air dry.

Urnex® Café Wipz

These can be used to wipe down any components of the brewer that cannot be easily removed

Reinstalling the Powder System


NOTE: Prior to reinstalling powder components, please make sure all components are completely dry.

Install the three powder hoppers



Carefully reinstall the powder hopper liner and caps.


NOTE: Start from one side and move across

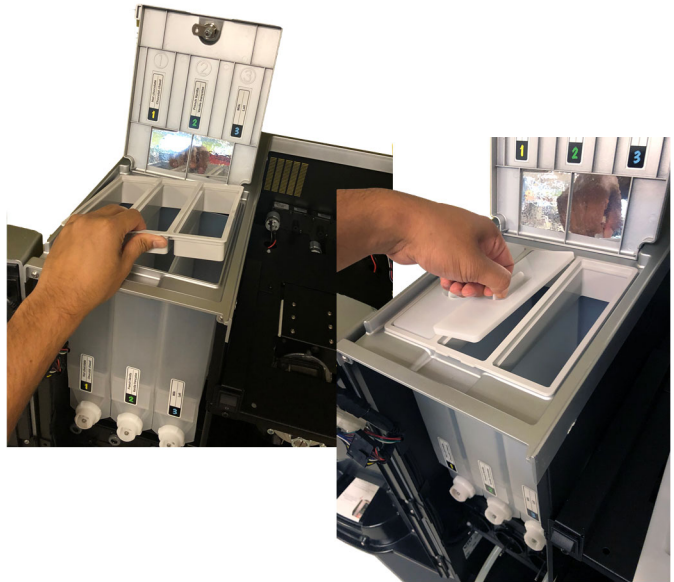

Fully reinsert the **red** powder drawer.



Carefully reinstall the locking rings with the lever in the 5 o'clock position so it fits under the upper tab.

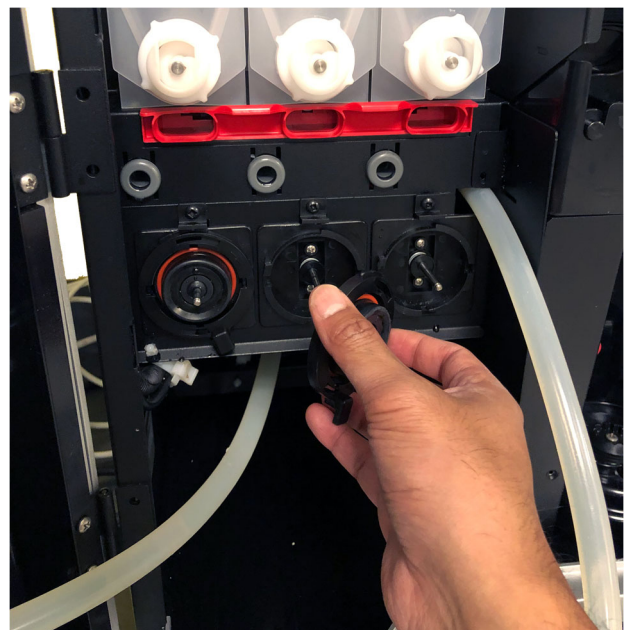

Reinstalling the Powder System *cont.*

Carefully reinstall the mixing disks.

NOTE: Align arrow with flat spot on motor shaft.




Install the mixing bowls and lock into place.

NOTE: Ensure each mixing chamber is secured by checking the tabs at the left & right are not protruding.



Reinstall the spout support.

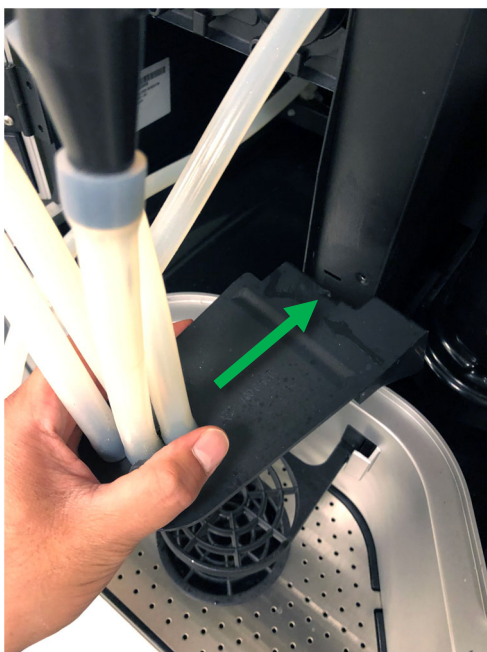

Reattach the hoses to the mixing bowls.



Reinstalling the Brewer Assembly

With wiper reinstalled, place the brewer assembly with red button slightly turned to 7:00 position.



Press the **red** button and turn counterclockwise until a “click” sound is heard.



Reattach the spout.

NOTE: Ensure that spout is inserted fully past both O-rings to prevent leakage and is firmly against brewer assembly body.




Reinstalling the Coffee Hopper

NOTE: If available, prior to reinstalling the coffee hopper, the grinder can be cleaned using Urnex® SuperGrindz

If available, add 1 cap full (26 grams) of Urnex® SuperGrindz on top of the grinder.



NOTE: Grinder cleaning instructions are available on Page 17.

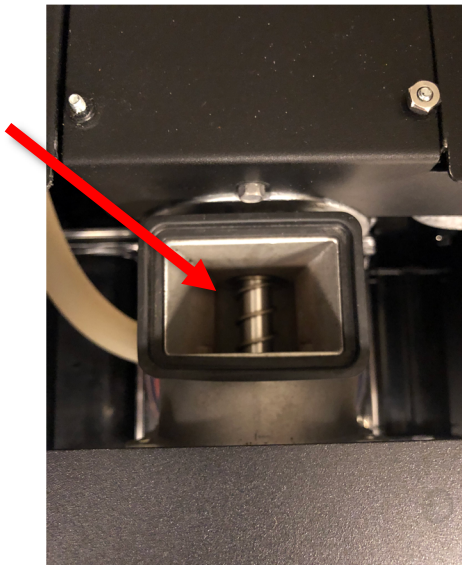

Carefully lower the coffee hopper onto grinder.




Tighten the two screws beneath the coffee hopper.

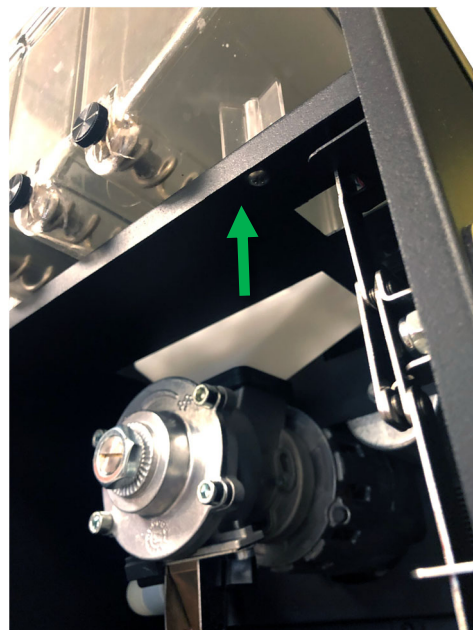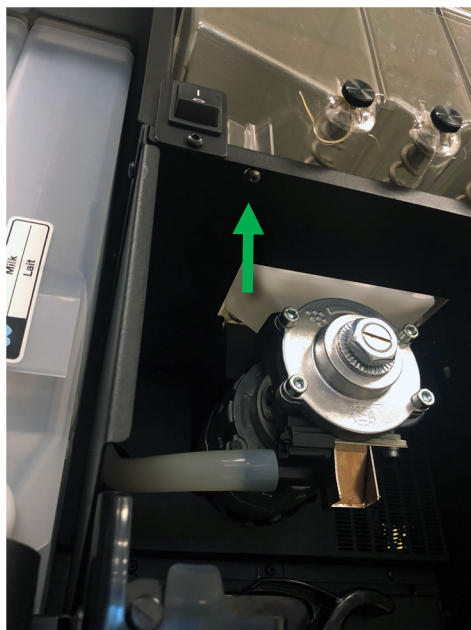


Restarting & Refilling

Reinsert the waste container.

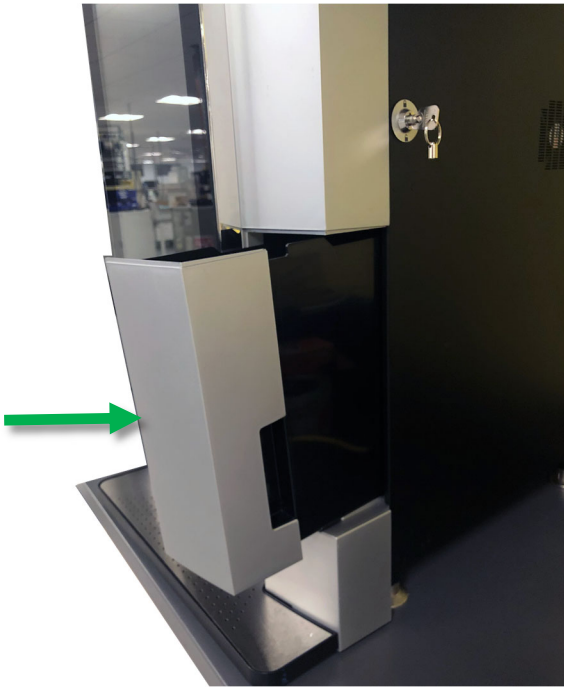

Close and lock the main door.

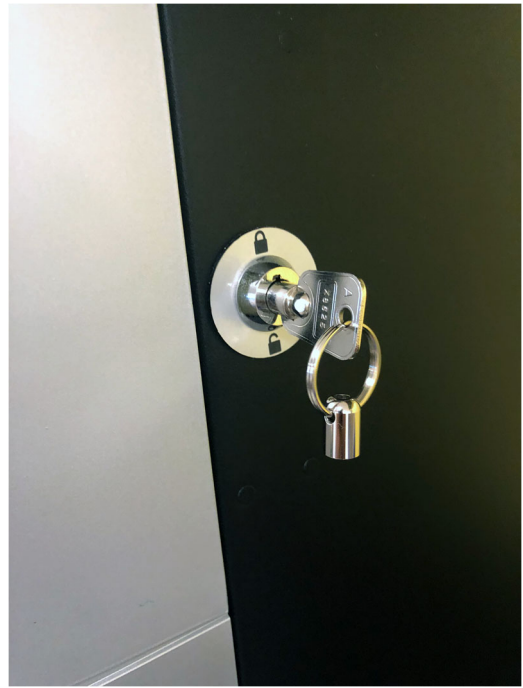

Carefully plug the GFCI power cord into a grounded outlet.



If disconnected, re-connect the water line to machine and turn power switch to — position.


NOTE: Allow for the machine fill & heat



External Cleaning

We recommend using the Urnex® Complete Café sanitizing solution noted on Page 11 on all external surfaces ONLY. Any household or commercial certified disinfectant wipe can be used. (following manufacturer's instructions).

NOTE: If available, Urnex® Café Wipz can be used on all external surfaces ONLY.

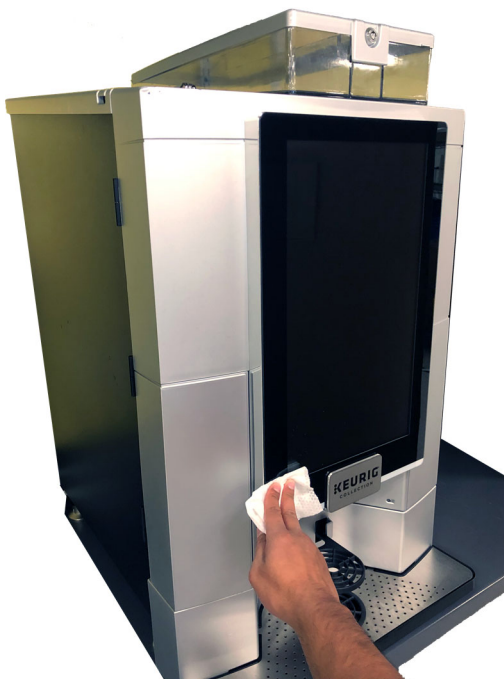


How to Perform Both Cleanings & Rinses

Press the top left of screen and hold for 3 seconds.


A faint square will light up under your finger.




Enter code: 345678

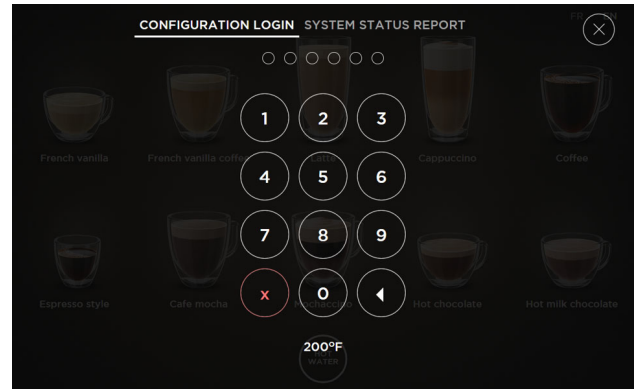

Press the 3 lines at top left of screen.

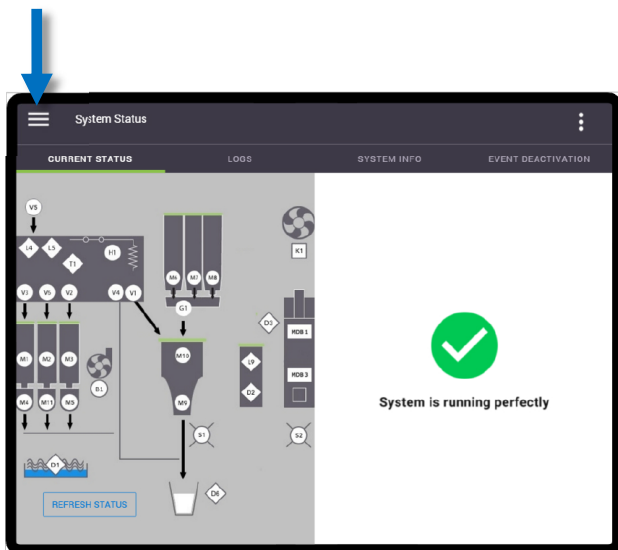


Select Maintenance.

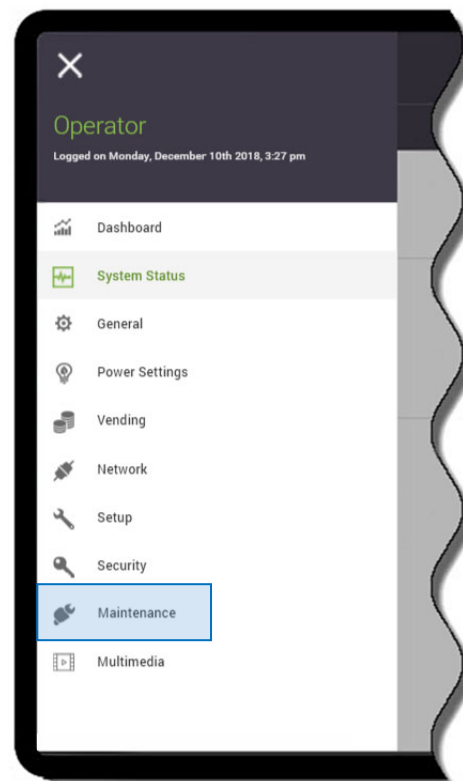



Performing a Grinder Cleaning

NOTE: Please reference page 14 prior to performing the following steps.

Place a 16oz cup on the drip tray and press Grinder cleaning.

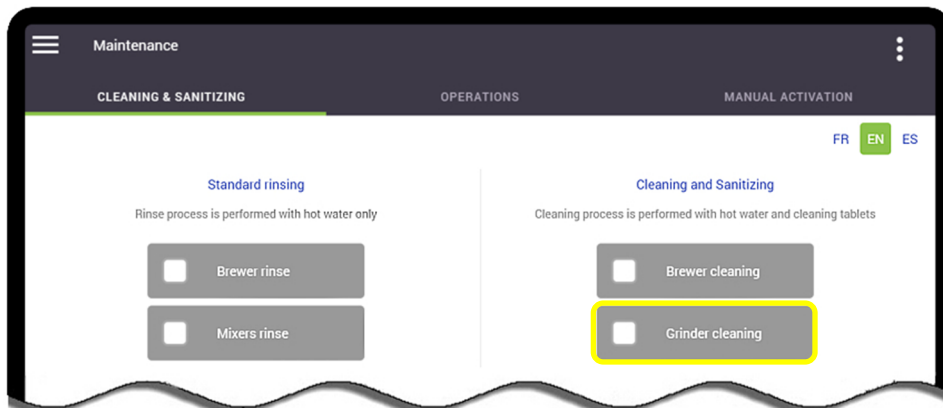


Carefully follow the screen instructions.

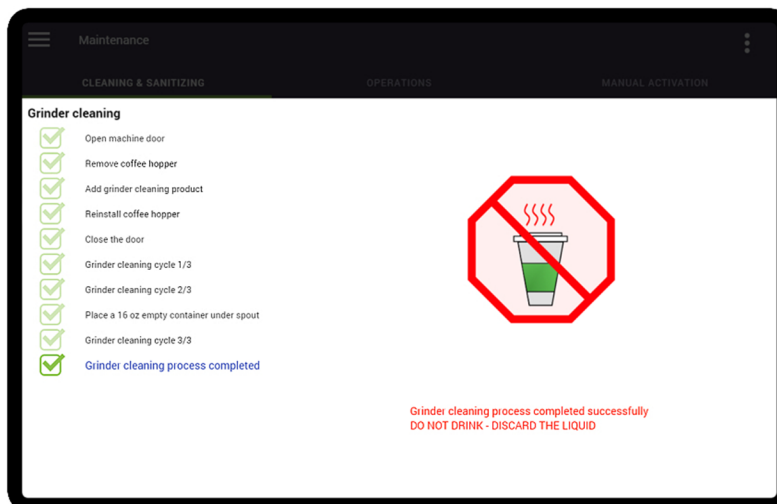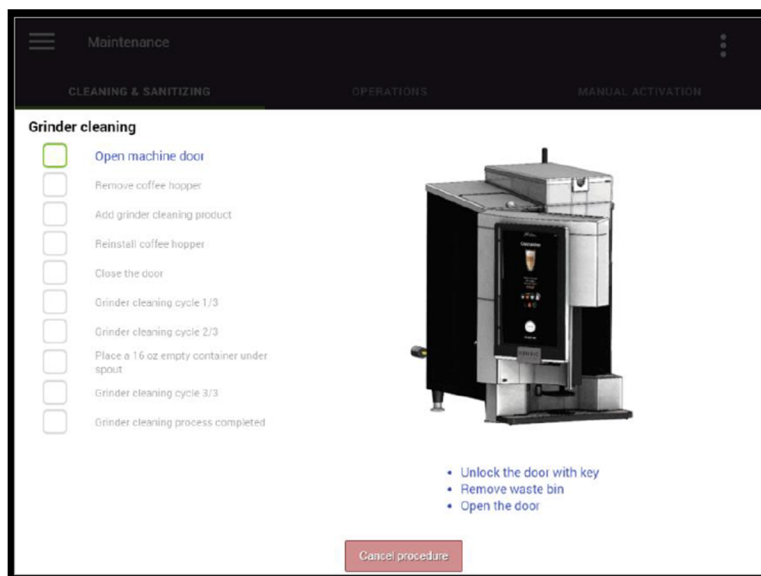


Performing a Brewer Cleaning

NOTE: If a "Brewer Assembly Cleaning Procedure" was done skip following step.

1. Remove waste container.
2. Unlock and open main door.
3. Add 1ea. Urnex® Tabz Z61 cleaning tablet to the top of the brewer assembly.
4. Close and lock main door.
5. Re-insert waste container.


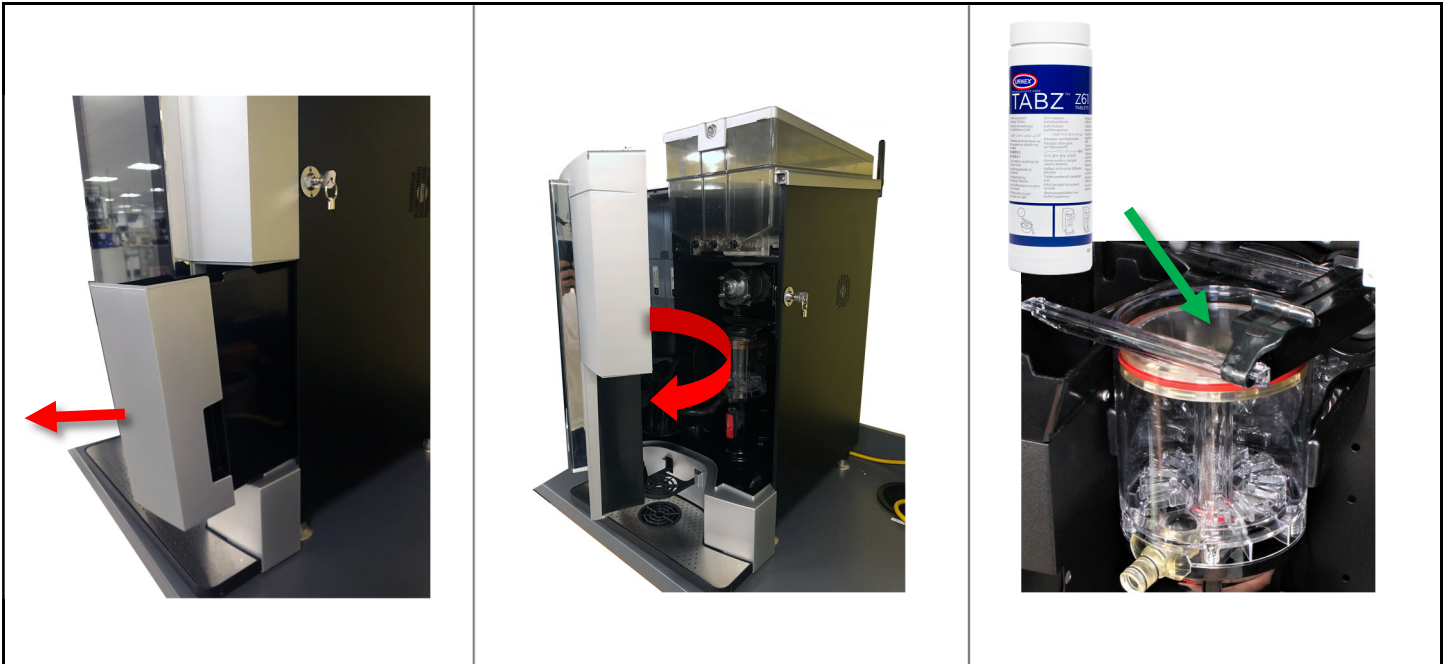


Place a 16oz cup on the drip tray and press Brewer cleaning.

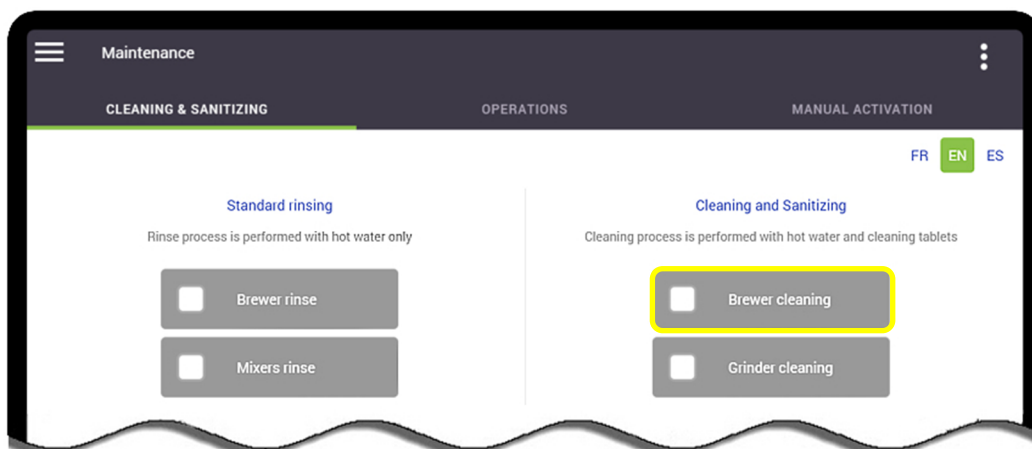


Performing a Brewer Cleaning *cont.*

Carefully follow the screen instructions.

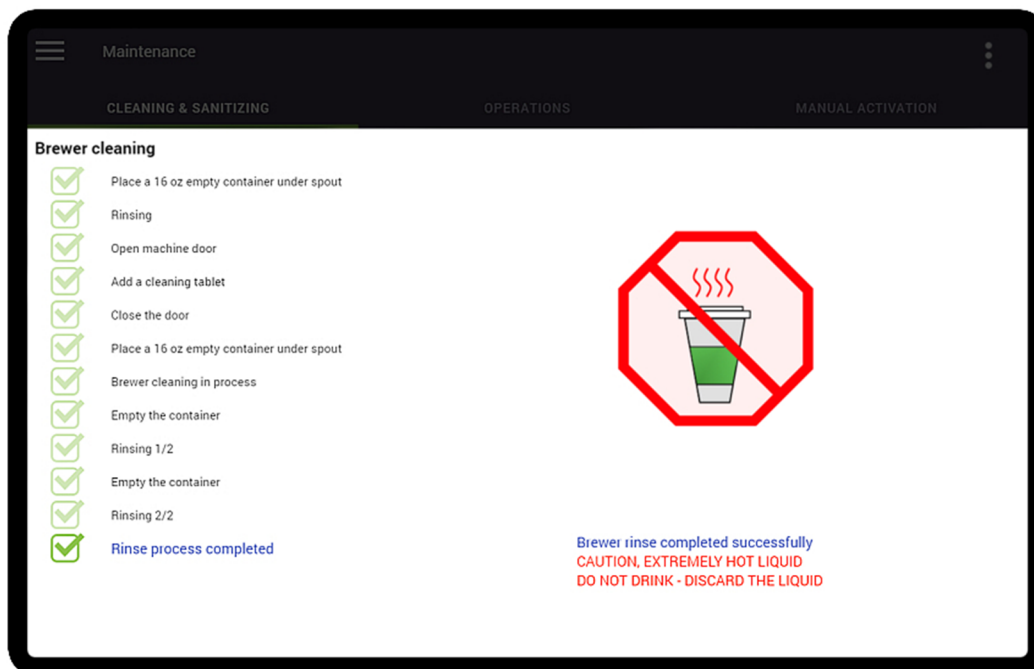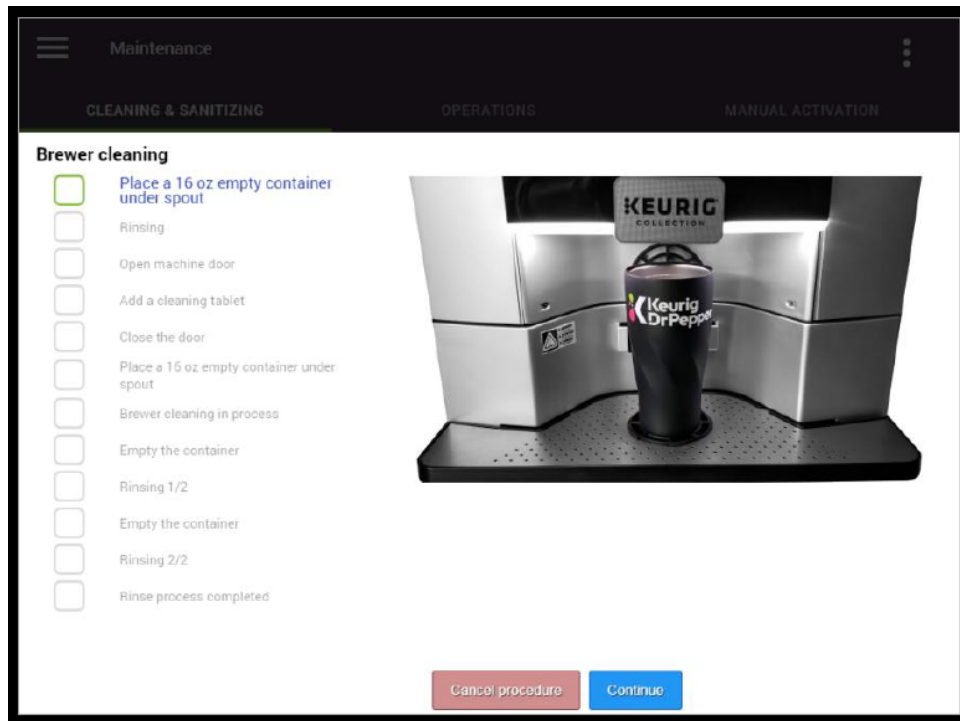


Carefully discard hot liquid.



Performing a Mixers Rinse

Place a 16oz cup on drip tray and press Mixers Rinse


NOTE: Check powder components for any leaks

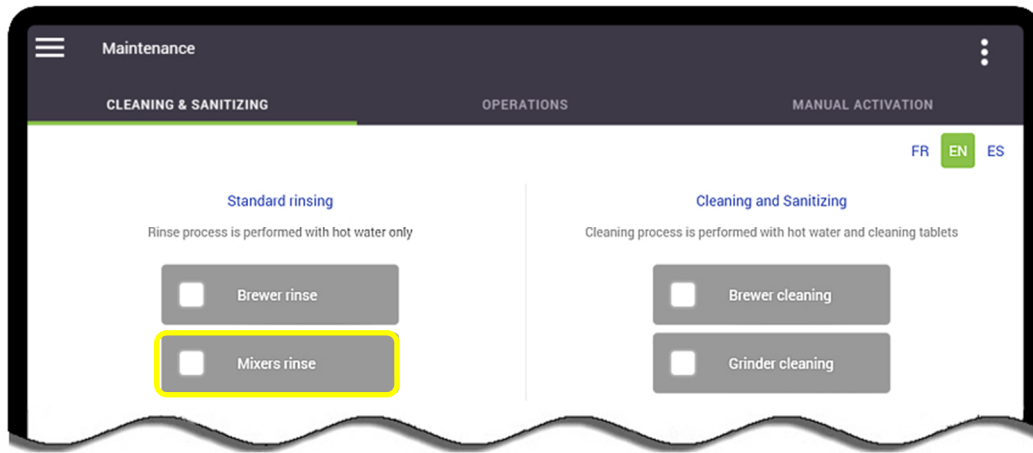

This option runs a rinse cycle (to clean all three of the powder whipper systems) by sending hot water through each of the whipper units, while at the same time activating each of the whipper motors.


This cycle is fully automated and does not require the use of any cleaning agents.

Carefully discard hot liquid.




Exiting the Service Menu

Log off by pressing three dots at top right.

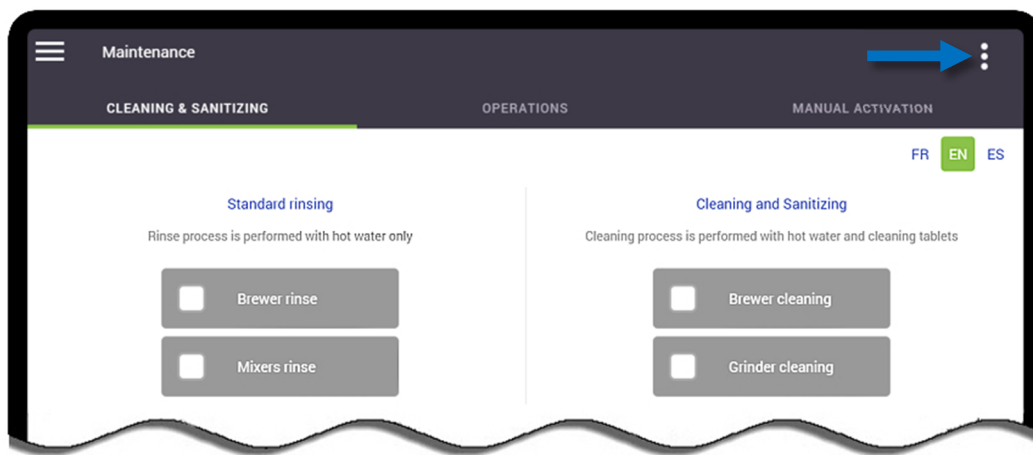


Cleaning the Lower Tray

1. Unlock and the remove waste container
2. Open the main door
3. Remove the lower tray (*shown below*) and thoroughly clean then reinsert.
4. Reinstall the grill
5. Close and lock the main door.
6. Re-insert the waste container.

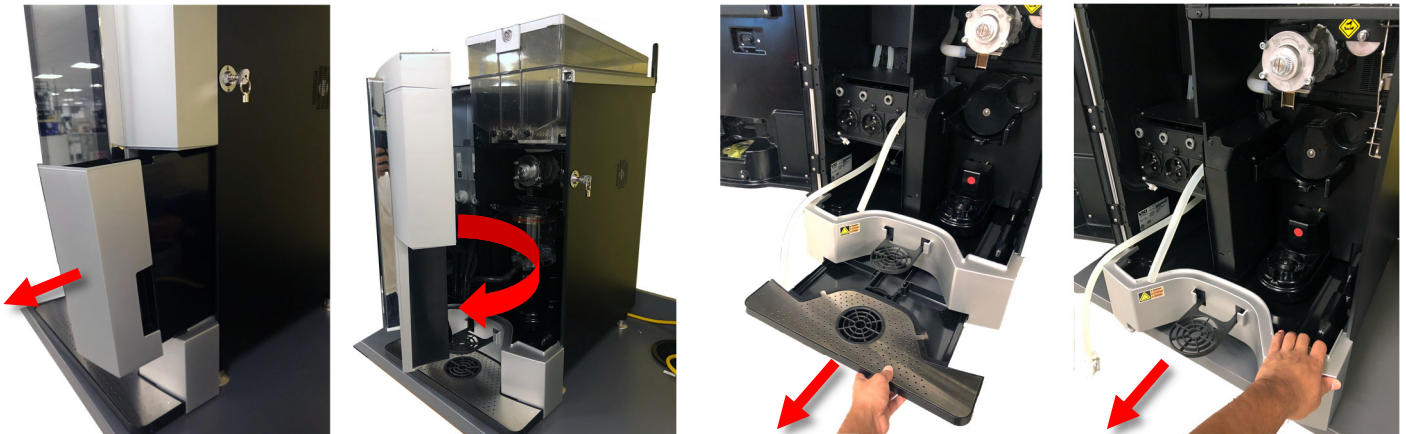

Performing Test Brews

1. Refill the coffee hoppers.
2. Refill the powder hoppers to level shown below.
NOTE: Do **NOT** overfill or pack powder hoppers.
3. Place a 16oz cup on the cup stand and perform a test brew by brewing both a coffee and cappuccino.

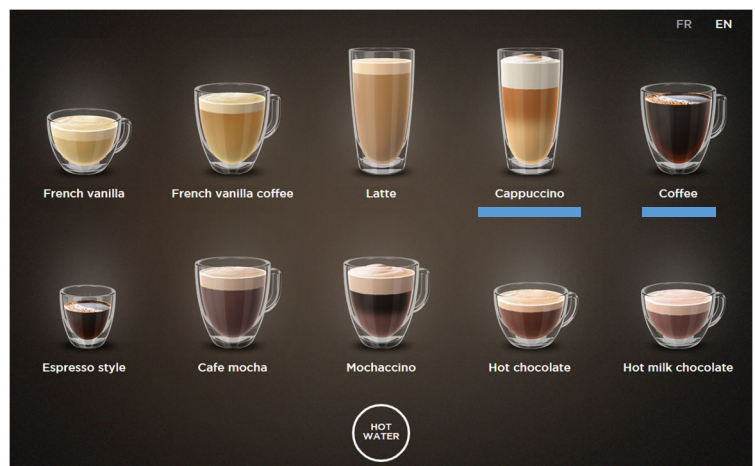

Procedure Complete!

If you have any questions, please contact Keurig® Commercial Technical Support: 888-287-2739 option 5